


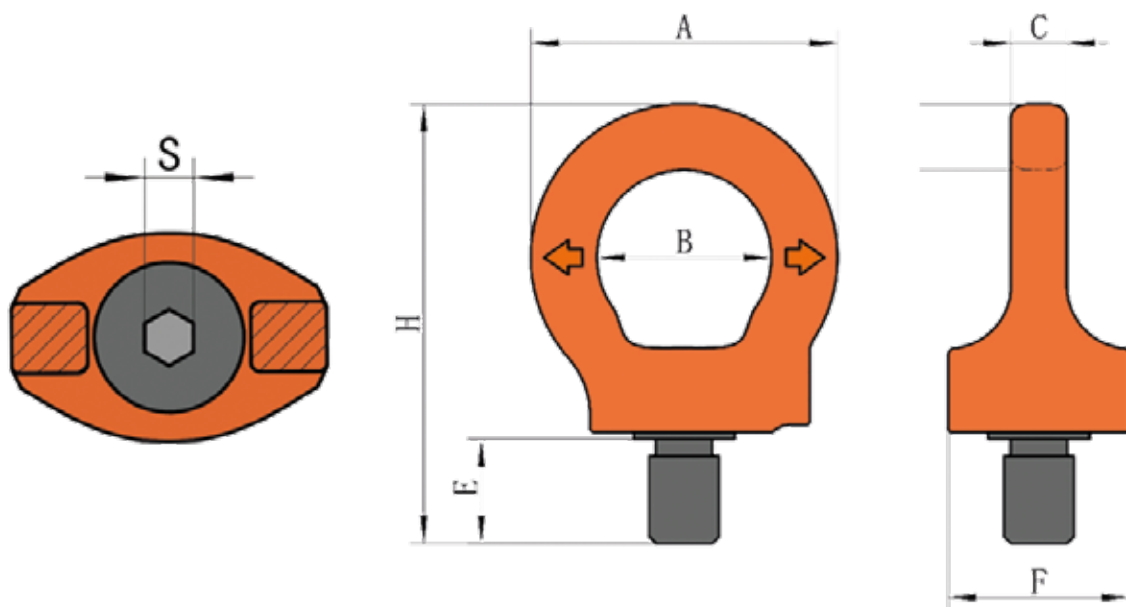

No.	Thread M	WLL t	E	A	B	C	D	F	H	S	Nm	Kg
M8	M8x1.25-6G	0.3	12	44	25	8	9.5	26	61.5	6	10	0.15
M10	M10x1.5-6G	0.4	15	44	25	8	9.5	26	64.5	6	10	0.15
M12	M12x1.75-6G	0.75	18	52	30	10	11	32	76	8	10	0.2
M14	M14x2.0-6G	0.75	18	52	30	10	11	32	76	8	20	0.2
M16	M16x2.0-6G	1.5	24	61	35	14	13	39	91	10	30	0.35
M18	M18x2.5-6G	1.5	24	61	35	14	13	39	91	10	40	0.35
M20	M20x2.5-6G	2.3	30	70	40	16	15	47	108	12	70	0.6
M22	M22x2.5-6G	2.3	30	70	40	16	15	47	108	12	80	0.6
M24	M24x3.0-6G	3.2	36	84	48	19	18	55	127	14	150	1
M27	M27x3.0-6G	3.2	36	84	48	19	18	55	127	14	200	1
M30	M30x3.5-6G	4.5	45	105	60	24	22.5	67	159	17	350	2
M33	M33x3.5-6G	4.5	45	105	60	24	22.5	67	159	17	350	2
M36	M36x4.0-6G	7	54	126	72	29	27	85	195	22	410	3
M42	M42x4.5-6G	9	63	147	82	34	32.5	98	225.5	22	550	5
M48	M48x5.0-6G	12	72	168	96	38	36	114	259	27	550	7.5

									
1 tratto 1 leg	2 tratti 2 legs	1 tratto 1 leg	2 tratti 2 legs	2 tratti 2 legs		2 tratti 2 legs	3-4 tratti 3-4 legs		3-4 tratti 3-4 legs
0°	0°	90°	90°	0-45°	45-60°	Asym	0-45°	45-60°	Asym
WLL t									
1	2	0.3	0.6	0.42	0.3	0.3	0.63	0.45	0.3
1	2	0.4	0.8	0.56	0.4	0.4	0.8	0.6	0.4
2	4	0.75	1.5	1	0.75	0.75	1.5	1.1	0.75
2	4	0.75	1.5	1	0.75	0.75	1.5	1.1	0.75
4	8	1.5	3	2.1	1.5	1.5	3.1	2.2	1.5
4	8	1.5	3	2.1	1.5	1.5	3.1	2.2	1.5
6	12	2.3	4.6	3.2	2.3	2.3	4.8	3.4	2.3
6	12	2.3	4.6	3.2	2.3	2.3	4.8	3.4	2.3
8	16	3.2	6.4	4.5	3.2	3.2	6.7	4.8	3.2
8	16	3.2	6.4	4.5	3.2	3.2	6.7	4.8	3.2
12	24	4.5	9	6.3	4.5	4.5	9.4	6.7	4.5
12	24	4.5	9	6.3	4.5	4.5	9.4	6.7	4.5
16	32	7	14	9.8	7	7	14.7	10.5	7
24	48	9	18	12.6	9	9	18.9	13.5	9
32	64	12	24	16.8	12	12	25	18	12